


ECP48CX-5

Total weight 79,060 lbs (35,861kg)

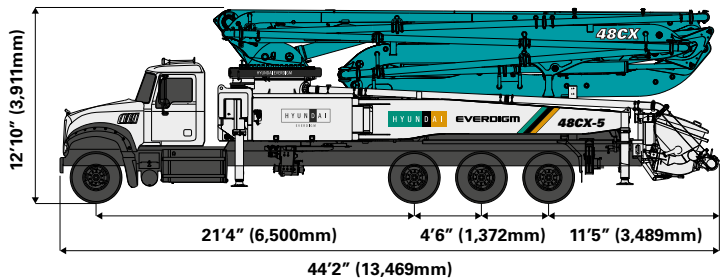

Dimensions will vary with different truck makes, models and specifications.
Weights are approximate and include pump, boom, truck, driver and some fuel. Varies with options selected.

BOOM


Folding type	5-section RZ-folding
Max. vertical reach	154'6" (47.1m)
Max. horizontal reach	138'1" (42.1m)
Max. depth reach	108'7" (33.1m)
Unfolding height	39'3" (12m)
Slewing angle	360deg.
End hose length	10' (3m)
Delivery pipe dia.	5" (125mm)

PUMP

*refer to P3 for 2120 pump cell

Pump cell (*option)	2116 (*2120)
Control system	Closed Free Flow Hydraulic
Main pump	A4VG125x2
Concrete cylinder	9"x 83" (230 x 2,100mm)
Strokes No.(per min.)	30
Concrete output	210yd ³ /hr (160m ³ /h)
Concrete pressure	1,233psi (85bar)
Transfer tube type	S-Tube,S2318 (Dia. 230-180mm)
Volume of hopper	158gal (600L)


WORKING RANGE

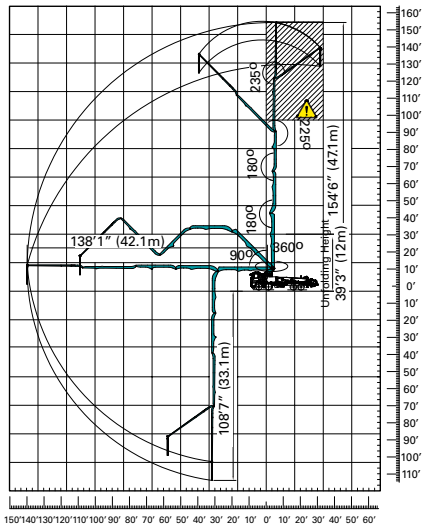

⚠ Don't use in caution area

UNIT : (ft.in)

OUTRIGGER SPREAD



Front outrigger type X(Diagonal) Extension
Rear outrigger type Swing-out

